



# Conquest BAC-5900 Series

## BACnet General Purpose Controllers (B-AAC)

### DESCRIPTION

KMC Conquest™ BAC-5900 series controllers are designed to control building systems and HVAC equipment. The integrated alarming, scheduling, and trending enable these BACnet Advanced Application Controllers to be powerful edge devices for the modern smart building ecosystem.

The controllers feature simple, menu-driven setup choices using an STE-9000 series digital sensor, which can be installed permanently as the room sensor or used temporarily as a technician's service tool.

Alternately, quick configuration of controller properties can be done using NFC (Near Field Communication) from a smart phone, tablet, or computer (using KMC Connect Lite™ app or software) while the controller is unpowered.

The Ethernet-enabled BAC-5901CE can also be configured by connecting an HTML5-compatible web browser to the built-in configuration web pages.

To meet the most demanding building automation custom requirements, these controllers are also fully programmable. Custom configuration and programming, with wizards for application programming selection/configuration, are enabled by KMC Connect™ software and the KMC Converge™ module for NiagaraAX Workbench.

KMC Converge and TotalControl™ software additionally provide the capability of creating custom graphical web pages (hosted on a remote web server) to use as a custom user-interface for the controllers.

(BAC-5901C with MS/TP Shown)



### APPLICATIONS

Can be used with the following types of equipment:

- Air handling units
- Boilers
- Chillers
- Chilled beams
- Cooling towers
- Fan coil units
- Heat pump units
- Pumps
- Roof top units
- Unit ventilators
- Other HVAC and building automation system equipment

(See also [Sample Installation on page 6.](#))


### MODELS

| APPLICATIONS   | INPUTS*  | OUTPUTS*   | FEATURES              |               |            | MODEL      |
|--|--|--|-----------------------|---------------|------------|------------|
|  |  |  | Real Time Clock (RTC) | Ethernet Port | MS/TP Port |            |
| AHU, chillers, boilers, cooling towers, pumps, lighting, FCU, HPU, RTU, unit ventilators, other HVAC | 10 total:<br>• 2 analog (temperature sensor port)<br>• 8 universal inputs (software configurable as analog, binary, or accumulator on terminals) | 8 universal:<br>• Software configurable as analog or binary<br>• Override boards give additional options** | ✓                     |               | ✓          | BAC-5901C  |
|  |  |  |                       | ✓             |            | BAC-5901CE |

\*Up to four (8 x 8) CAN-5901 I/O expansion modules can be used with BAC-5900 series controllers to provide up to (internal and external) 42 inputs and 40 outputs.

\*\*HPO-6700 series output override board series provide (triac, NC/NO relays, 4–20 mA, adjustable 0–10 VDC) options for devices that cannot be powered from a standard universal output. The boards can also be used with the CAN-5901.

# SPECIFICATIONS

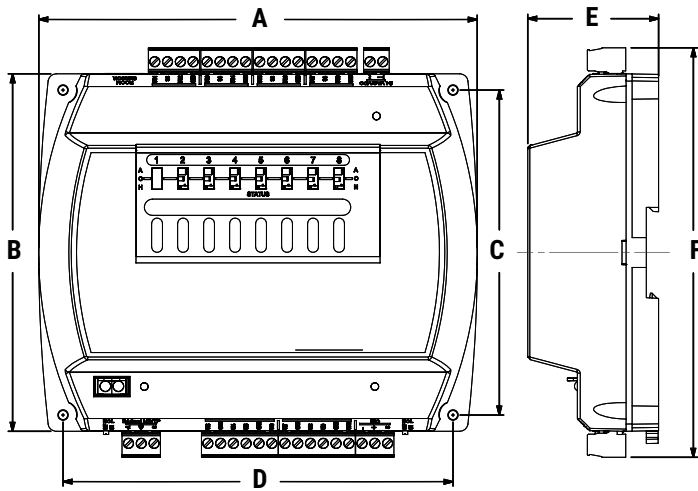

| DIMENSIONS |              |        |
|------------|--------------|--------|
| <b>A</b>   | 6.750 inches | 171 mm |
| <b>B</b>   | 5.500 inches | 140 mm |
| <b>C</b>   | 5.000 inches | 127 mm |
| <b>D</b>   | 6.000 inches | 152 mm |
| <b>E</b>   | 2.012 inches | 51 mm  |
| <b>F</b>   | 6.300 inches | 160 mm |


## Inputs and Outputs

### Inputs, Universal (8 on Terminal Blocks)

|                  |  |
|------------------|--|
| Universal inputs | Configurable as analog, binary, or accumulator objects                               |
| Termination      | 1K and 10K ohm sensors, 0–12 VDC, or 0–20 mA (without need for an external resistor) |
| Resolution       | 16-bit analog-to-digital conversion  |
| Protection       | Overvoltage protection (24 VAC, continuous)  |
| Wire size        | 12–24 AWG, copper, in removable screw terminal blocks                                |

### Input, Dedicated Room Sensor Port

|           |   |
|-----------|---|
| Connector | Modular connector for STE-9xx1 series digital wall sensors or STE-6010/6014/6017 analog temperature sensors |
| Cable     | Uses standard Ethernet patch cable up to 150 feet (45 meters)   |

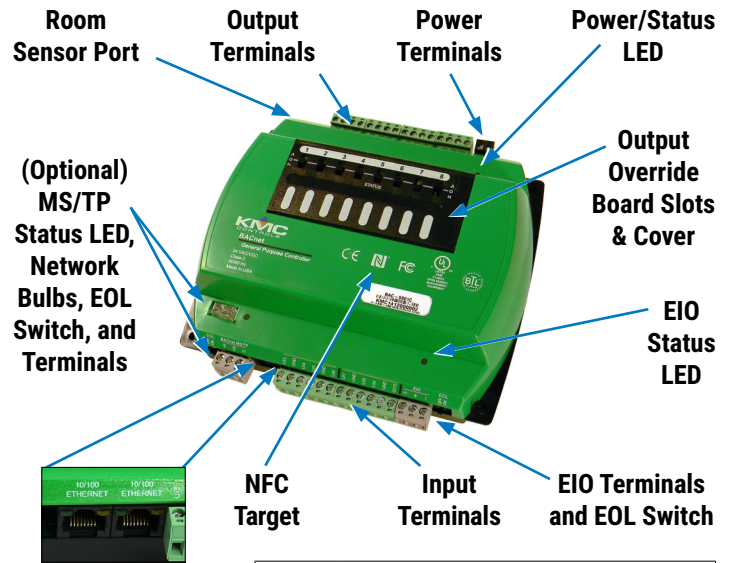

| TERMINAL COLOR CODE |                              |
|---------------------|------------------------------|
| <b>Black</b>        | 24 VAC Power                 |
| <b>Gray</b>         | MS/TP and CAN Communications |
| <b>Green</b>        | Inputs and Outputs           |

### Outputs, Universal (8 on Terminal Blocks)

|                   |  |
|-------------------|--|
| Universal outputs | Configurable as an analog (0 to 12 VDC) or binary object (0 or 12 VDC, on/off); alternately, an output override board is installed for devices that cannot be powered from a standard universal output |
| Power/protection  | Each short-circuit protected universal output capable of driving up to 100 mA (at 0–12 VDC) or 300 mA total for all outputs  |
| Resolution        | 12-bit digital-to-analog conversion  |
| Wire size         | 12–24 AWG, copper, in removable screw terminal blocks  |

## Communications

|                     |  |
|---------------------|--|
| Auxiliary           | One serial port with mini Type B connector (reserved for future use)   |
| Expansion           | One CAN serial bus connection (terminal block) for daisy-chaining I/O expansion modules up to 200 feet (61 meters) from the controller via standard shielded twisted-pair wire   |
| Ethernet (optional) | On “E” model only, two 10/100BaseT Ethernet connectors for BACnet IP, Foreign Device, and Ethernet 802.3 (ISO 8802-3); segmentation supported; up to 328 ft (100 m) between controllers (using T568B Category 5 or better cable) |

|                  |   |
|------------------|---|
| MS/TP (optional) | One EIA-485 port (removable terminal block) for BACnet MS/TP, operating (autobaud) at 9.6, 19.2, 38.4, 57.6, or 76.8 kilobaud; max. length of up to 4,000 feet (1,200 meters) of 18 AWG shielded twisted-pair, no more than 51 pf/ft (167 pf/m); use repeaters for longer distances |
| NFC              | NFC (Near Field Communication) up to 1 inch (2.54 cm) from the top of the enclosure   |
| Room sensor      | Modular STE connection jack for STE-9000 series digital sensors and STE-6010/6014/6017 analog sensors   |

## Configuring, Programming, and Designing

| SETUP PROCESS  |                             |                    | KMC CONTROLS TOOL  |
|----------------|-----------------------------|--------------------|--|
| Config-uration | Programming (Control Basic) | Web Page Graphics* |  |
| ✓              |                             |                    | Conquest NetSensor   |
| ✓              |                             |                    | Internal configuration web pages in Conquest Ethernet "E" models** |
| ✓              |                             |                    | KMC Connect Lite™ (NFC) app or software***                         |
| ✓              | ✓                           |                    | KMC Connect™ software  |
| ✓****          | ✓****                       | ✓                  | TotalControl™ software   |
| ✓              | ✓                           |                    | KMC Converge™ module for Niagara <sup>AX</sup> WorkBench           |
|                |                             | ✓                  | KMC Converge <b>GFX</b> module for Niagara <sup>AX</sup> WorkBench |

\*Custom graphical user-interface web pages can be hosted on a remote web server, but not in the controller.

\*\*Conquest Ethernet-enabled "E" models with the latest firmware can be configured with an HTML5 compatible web browser from pages served from within the controller. For information, see the [Conquest Ethernet Controller Configuration Web Pages Application Guide](#).

\*\*\*Near Field Communication via enabled smart phone or tablet running the KMC Connect Lite app or a PC (with an HPO-9003 NFC-Bluetooth/USB module/fob) running the KMC Connect Lite Desktop software.

\*\*\*\*Full configuration and programming of KMC Conquest controllers is supported starting with TotalControl ver. 4.0.

## Configurability

| OBJECTS*                             | MAXIMUM #     |
|--------------------------------------|---------------|
| <b>Inputs and Outputs</b>            |               |
| Analog, binary, or accumulator input | 42            |
| Analog or binary output              | 40            |
| <b>Values</b>                        |               |
| Analog value                         | 120           |
| Binary value                         | 80            |
| Multi-state value                    | 40            |
| <b>Program and Control</b>           |               |
| Program (Control Basic)              | 10            |
| PID loop                             | 10            |
| <b>Schedules</b>                     |               |
| Schedule                             | 2             |
| Calendar                             | 1             |
| <b>Logs</b>                          |               |
| Trend log                            | 20            |
| Trend log multiple (must be created) | 4 (default 0) |
| <b>Alarms and Events</b>             |               |
| Notification class                   | 5             |
| Event enrollment                     | 40            |

\*Configuration allows creation and deletion of objects (maximum number of objects shown). The number and configuration of default objects depends on the selected application. For lists of default objects, see the [KMC Conquest Controller Application Guide](#). See also the PIC statement for all supported BACnet objects.

## Hardware Features

### Processor, Memory, and Clock

|           |  |
|-----------|--|
| Processor | 32-bit ARM® Cortex-M4  |
| Memory    | Programs and configuration parameters are stored in nonvolatile memory; auto restart on power failure                                      |
| RTC       | Real time clock with (capacitor) power backup for 72 hours ("C" model only) for network time synchronization or full stand-alone operation |

## Indicators and Isolation

|                |  |
|----------------|--|
| LED indicators | Power/status, MS/TP and CAN communication, and Ethernet status             |
| MS/TP bulbs    | One network bulb assembly indicates reversed polarity and isolates circuit |
| Switches       | EOL (end of line) for MS/TP and CAN bus                                    |

## Installation

### Power

|                |  |
|----------------|--|
| Supply voltage | 24 VAC (-15%, +20%), 50/60 Hz, Class 2 only; non-supervised (all circuits, including supply voltage, are power limited circuits) |
| Required power | 14 VA, plus external loads   |
| Wire size      | 12-24 AWG, copper, in a removable screw terminal block   |

### Enclosure and Mounting

|               |   |
|---------------|---|
| Weight        | 14 ounces (0.4 kg)                      |
| Case material | Green and black flame retardant plastic |
| Mounting      | Direct mounting to panels or DIN rails  |

### Environmental Limits

|           |   |
|-----------|---|
| Operating | 32 to 120° F (0 to 49° C)                   |
| Shipping  | -40 to 160° F (-40 to 71° C)                |
| Humidity  | 0 to 95% relative humidity (non-condensing) |

## Warranty, Protocol, and Approvals

### Warranty

KMC Limited Warranty 5 years (from mfg. date code)

### BACnet Protocol

|          |  |
|----------|--|
| Standard | Meets or exceeds the specifications in ANSI/ASHRAE BACnet Standard 135-2010 for Advanced Application Controllers |
| Type     | BTL-certified as a B-AAC controller type (pending)   |

### CAN Protocol

|     |  |
|-----|--|
| CAN | CAN (Controller Area Network) bus on terminals |
|-----|--|

### Regulatory Approvals

|      |   |
|------|---|
| UL   | UL 916 Energy Management Equipment listed   |
| BTL  | BACnet Testing Laboratory listed as Advanced Application Controller (B-AAC) (pending) |
| CE   | CE compliant (pending)  |
| RoHS | RoHS compliant (pending)  |
| FCC  | FCC Class A, Part 15, Subpart B and complies with Canadian ICES-003 Class A*          |

\*This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. (NFC operation meets FCC compliance while the controller is in an unpowered state.)

## ACCESSORIES

NOTE: For accessory details, see the respective product data sheets and installation guides.

### Actuators

|                 |  |
|-----------------|--|
| <b>MEP-4xxx</b> | Actuators, 25 to 90 in-lb., fail-safe and non-fail-safe    |
| <b>MEP-7xxx</b> | Actuators, 180 and 320 in-lb., fail-safe and non-fail-safe |

### Communications

|                  |   |
|------------------|---|
| <b>BAC-5051E</b> | Single port router                            |
| <b>HPO-0055</b>  | Replacement network bulb assembly (pack of 5) |
| <b>HPO-5551</b>  | Router technician cable kit                   |
| <b>HPO-9003</b>  | NFC Bluetooth/USB module (fob)                |
| <b>HSO-9001</b>  | Ethernet patch cable, 50 feet                 |
| <b>HSO-9011</b>  | Ethernet patch cable, 50 feet, plenum rated   |
| <b>HSO-9012</b>  | Ethernet patch cable, 75 feet, plenum rated   |
| <b>KMD-5567</b>  | Network surge suppressor                      |

### I/O Expansion and Output Override Boards

|                 |  |
|-----------------|--|
| <b>CAN-5901</b> | I/O expansion module, 8 x 8                                    |
| <b>HPO-6701</b> | Triac output w/ zero-cross switching (AC only)                 |
| <b>HPO-6702</b> | 0–10 VDC analog with adjustable override potentiometer         |
| <b>HPO-6703</b> | Relay, NO contacts (AC/DC)                                     |
| <b>HPO-6704</b> | 4–20 mA DC current loop with adjustable override potentiometer |
| <b>HPO-6705</b> | Relay, NC contacts (AC/DC)                                     |

## Miscellaneous Hardware

|                 |   |
|-----------------|---|
| <b>HCO-1103</b> | Steel control enclosure with DIN rail mounting, 10 x 7.5 x 2.5 inches (257 x 67 x 193 mm)                             |
| <b>HPO-0063</b> | Replacement output (override board) jumper, 2-pin (pack of 5)   |
| <b>HPO-9901</b> | Controller replacement parts kit with terminal blocks and DIN clips   |
| <b>SP-001</b>   | (KMC branded) screwdriver with a hex end (for NetSensor cover screws) and a flat blade end (for controller terminals) |

### Room Sensors, Analog

|                    |   |
|--------------------|---|
| <b>STE-6010W10</b> | Temperature sensor, white                                   |
| <b>STE-6014W10</b> | Sensor with rotary setpoint dial, white                     |
| <b>STE-6017W10</b> | Sensor with rotary setpoint dial and override button, white |

NOTE: Other STE-6000 series sensors are not fully compatible with the dedicated sensor port. However, various other models can be used with the screw terminals. See the STE-6000 series data sheet for more information. For digital sensor information, see the STE-9000 series data sheet.

NOTE: To order the STE-601x sensor with light almond color instead of white, drop the W on the end of the model number (e.g., STE-6010W is white and STE-6010 is light almond).

### Room Sensors, Digital (LCD Display)

|                        |  |
|------------------------|--|
| <b>STE-9000 Series</b> | KMC Conquest NetSensor digital room temp. sensors for viewing and configuration and optional humidity, occupancy, and CO <sub>2</sub> sensing (see STE-9000 series data sheet for options) |
| <b>HPO-9001</b>        | NetSensor distribution module (future release)   |


### Sensors, Miscellaneous

|                 |                                    |
|-----------------|------------------------------------|
| <b>STE-1405</b> | DAT sensor with plenum-rated cable |
| <b>STE-1451</b> | OAT sensor                         |

### Transformers, 120 to 24 VAC

|                     |                   |
|---------------------|-------------------|
| <b>XEE-6111-050</b> | 50 VA, single-hub |
| <b>XEE-6112-050</b> | 50 VA, dual-hub   |

## SAMPLE INSTALLATION

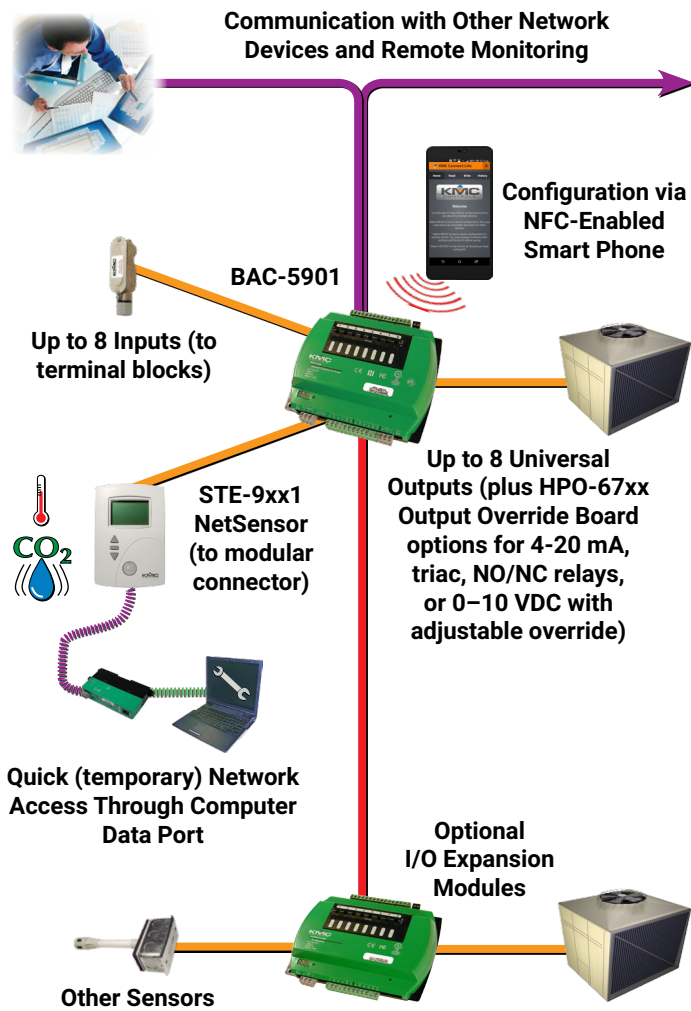

For more information about installation and operation, see:

- [BAC-5900 Series Controller Installation Guide](#)
- [KMC Conquest Controller Application Guide](#)

## SUPPORT

Additional resources for installation, configuration, application, operation, programming, upgrading, and much more are available on the web at [www.kmccontrols.com](http://www.kmccontrols.com). To see all available files, log-in to the KMC Partners site.

