



IEE 1401 RELAY SPDT WITH MANUAL BYPASS SWITCH (9 – 12 Vdc)

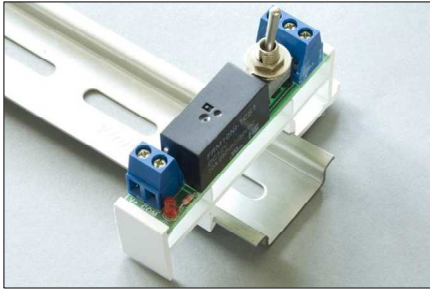


LED
DIN Rail compatible



Switch
ON = Manual
OFF = Auto

Bypass Switch

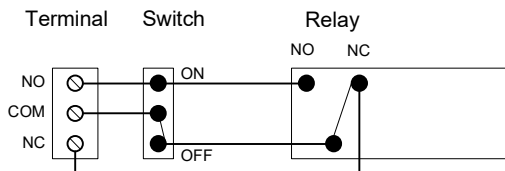

RELAY

| | |
|-----------------------------|--|
| Arrangement : | 1C (SPDT) |
| Material : | Silver alloy |
| Currant(résistive): | 10A/250Vac |
| Contact resistnace : | 50 $\mu\Omega$ \square Max. |
| Life : | Mécanique 10,000,000 Electrique 1,000,000 |

E141516 

POWER CONSUMPTION

19 mA @ 10 vdc

COMPONENTS

Terminal :  E133988(R)
14 to 24 gauge
10Amp, 300Vac  LR100420

Circuit board :
FR4 Fire Retardant
UL Flame Class 94 V-0

Snap Track :
Plastic , PVC
UL Flame Class 94 V-0

Dimension :
L (70mm) 2.750" x W (16mm) 0.600" x H (20mm) 0.800"

Installation
Insert from left side



Press on right side



Remove with flat screw driver

