

### Description

The SimplyVAV digital sensors are wall-mounted, temperature sensors for use with SimplyVAV series controllers. Key features include the following:

- ◆ Integrated operator interface that is ready to use with SimplyVAV series controllers
- ◆ Large LCD display
- ◆ Simple, three-button interface
- ◆ Continuous display of temperature and time
- ◆ Can be used as a service tool to set up SimplyVAV controllers
- ◆ Optional motion sensor to detect space occupancy and control temperature setback

### Specifications

#### Display

- ◆ Multifunctional LCD
- ◆ 1.88 x 1.25 in. (48 x 32 mm)

#### Compatibility

SimplyVAV controllers

#### Controller Connection

Connector type	Eight-wire RJ-45 modular jack
Cable type	Standard Ethernet cable up to 75 feet (22.9 meters)
Power	Supplied by connected controller
Mounting	Surface mount directly to any flat surface or to a 2 x 4 inch or 4 x 4 inch handy-box. Mounting on a 4 x 4 inch box requires a mounting backplate.
Weight	2.8 ounces (80 grams)
Material	Flame retardant plastic

#### Sensor accuracy

Type	Thermistor
Accuracy	$\pm 0.36^{\circ}\text{F}$ ( $\pm 0.2^{\circ}\text{C}$ )
Resistance	10,000 $\Omega$ at 77° F (25° C)
Operating range	48 to 96° F (8.8 to 35.5° C)




#### Environmental Limits


Operating Temperature	34° to 125° F (1.1 to 51.6° C)
Shipping Temperature	-40° to 140° F (-40° C to 60° C)
Humidity	0 to 95% relative humidity non-condensing

#### Motion sensor

Detector type	Passive infrared
Range	33 feet (10 meters). See diagrams.

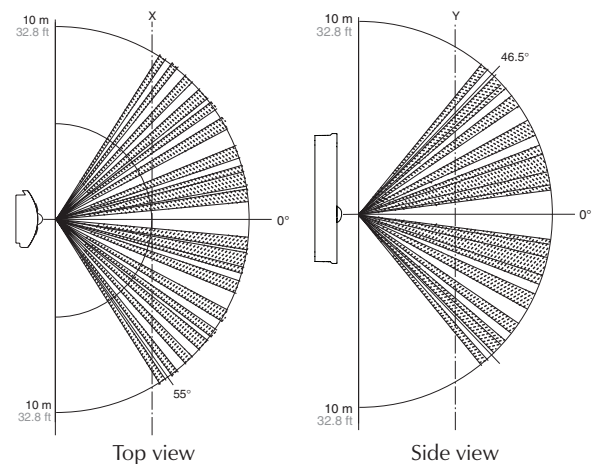

## Dimensions

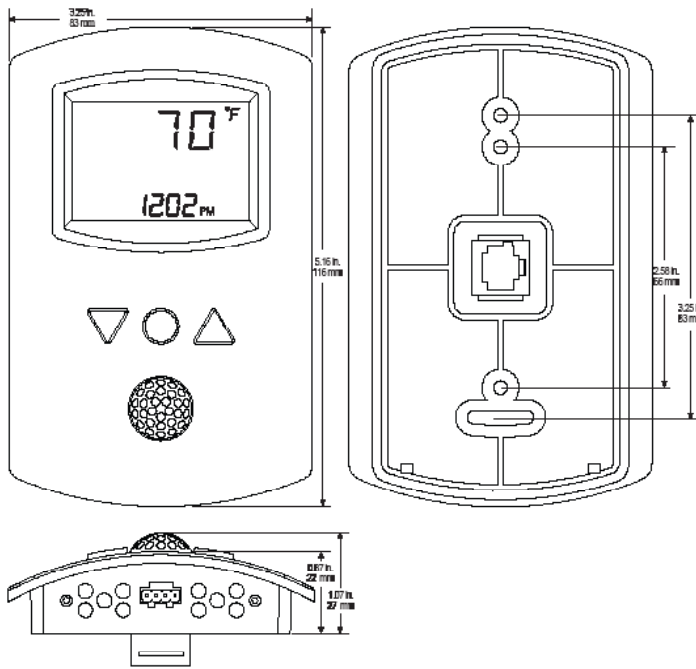

## Regulatory

- ◆ CE compliant
- ◆ SASO PCP Registration KSA R-103263
- ◆ FCC Class B, Part 15, Subpart B and complies with Canadian ICES-003 Class B

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



## Accessories

- HMO-1161W80 4 x 4 inch backplate, white
- HPO-1161 Foam insulating gasket

## Sensor selection guide

See the data sheet for SimplyVAV STE-6000 series sensors for detail on those models.

Model	Temperature sensor	Setpoint dial	Override button	Setpoint buttons	Motion sensor	Digital display	Configuration tool	Balancing tool
STE-8001W80	u			u		u	u	u
STE-8201W80	u			u	u	u	u	u
STE-6010W80	u							
STE-6014W80	u	u						
STE-6017W80	u	u	u					

## Ordering information

Model description	Model number
SimplyVAV digital temperature sensor	STE-8001W80
SimplyVAV digital temperature and motion sensor	STE-8201W80

**KMC Controls, Inc.**  
 19476 Industrial Drive  
 New Paris, IN 46553  
 574.831.5250  
[www.kmcccontrols.com](http://www.kmcccontrols.com)  
[info@kmcccontrols.com](mailto:info@kmcccontrols.com)